



DO THE JOB RIGHT.

EASTWOOD'S EXTREME CHASSIS BLACK gives your frame and suspension a brand new look, while providing you superior protection from road debris and harsh chemicals. Extreme Chassis Black has three times the resins of Eastwood's Original Chassis Black ensuring a deeper, more durable, longer lasting finish. Its high solids content offers excellent UV protection and will withstand extreme temperatures up to 300°F. One can covers approximately 8 square feet. For best results, apply over Extreme Chassis Black Primer.

DIRECTIONS

1. Surface must be clean and dry before painting. Use Eastwood PRE Painting Prep to remove grease and oil. Can be applied over bare metal or over primer. For increased adhesion and durability, prime bare metal with Extreme Chassis Black™ Primer Aerosol (11193Z), wait 4 hours (scuff surface beyond 36 hours with 320 grit) and topcoat with Extreme Chassis Black™. Do not use over self-etching primers. Test for compatibility if not using over Extreme Chassis Black™ Primer or Eastwood Rust Encapsulator™. For best results, use when can and surface are between 70°-90°F (21°-32°C), 50% or less humidity.
2. SHAKE CAN VIGOROUSLY for at least one minute before and occasionally during use. Spray surface with steady, even strokes at a distance of 8-10 inches. Several light coats give a better finish than one heavy coat.
3. Apply enough paint to achieve full hiding. For fastest cure, apply a maximum of 2 coats primer and 2 coats Chassis Black.
4. If clogging develops, turn spray button 1/4 turn or remove and clean spray button slot. DO NOT stick objects into can opening.
5. Finished article should be allowed to dry at least 4 hours before use, full cure in 12-24 hours.

CONTAINS: n-Hexane 110-54-3, Liquefied Petroleum Gas 68476-85-7, Stoddard Solvent 8052-41-3, Xylene 1330-20-7, Acetone 67-64-1, t-Butyl Acetate 540-88-5, and Carbon Black 1333-86-4.

DANGER: Vapor Harmful. May affect the brain or nervous system causing dizziness, headache, or nausea. Causes eye, skin, nose, and throat irritation. Do not puncture or incinerate (burn) container. Exposure to heat or prolonged exposure to sun may cause bursting. Do not store at temperatures above 120°F.

NOTICE: Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents may be harmful or fatal.

Vapors May Ignite Explosively. Keep away from heat, sparks, and flame. Do not smoke. Extinguish all flames and pilot lights and turn off stoves, heaters, electric motors, and other sources of ignition during use and until all vapors are gone. Prevent build-up of vapors by opening windows and doors to achieve cross-ventilation.

Use Only With Adequate Ventilation. Do not breathe dust, vapors, or spray mist. To avoid breathing vapors or spray mist, open windows and doors or use other means to ensure fresh air entry during application and drying. If you experience eye watering, headaches, or dizziness, increase fresh air or wear respiratory protection (NIOSH/MSHA approved) or leave the area. Close container after each use. Avoid contact with eyes, skin, and clothing.

FIRST AID: If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical attention immediately. In case of eye contact, flush immediately with plenty of water for at least 15 minutes and get medical attention. For skin, wash thoroughly with soap and water.

KEEP OUT OF THE REACH OF CHILDREN

Non-Flat Paint Product Does Not Exceed 1.4 MIR.

WARNING: This product contains chemicals known to the State of California to cause cancer.


Only in the Event of a Chemical Emergency Involving A Spill, Leaks, Fire, or Exposure Call Chemtrec Toll Free Day or Night: 1-800-424-9300 International Call Collect: (202) 483-7616

Manufactured for The Eastwood Company, 263 Shoemaker Road, Pottstown, PA 19464
USA: 1-800-345-1178 Canada: 1-800-820-9042
International: (610) 323-2200 www.eastwood.com
© Copyright 2011 Easthill Group, Inc. Made in USA



EXTREME CHASSIS BLACK

SATIN FINISH

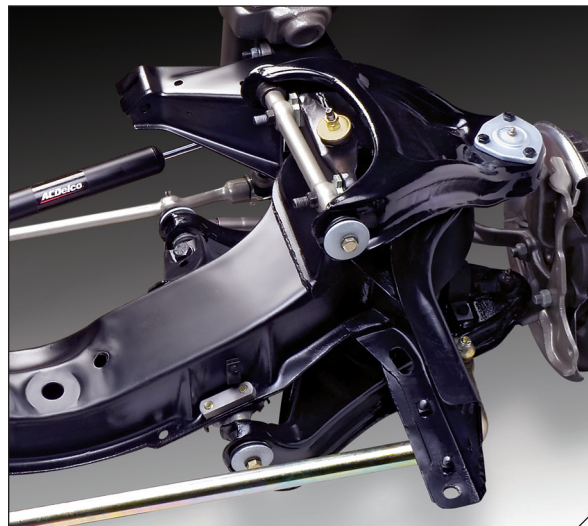

- 3X More Durable Than Original Chassis Black
- Maximum Solvent and Chip Resistance
- Average Coverage: 8 Sq. Ft.

DANGER:
EXTREMELY FLAMMABLE AND UNDER PRESSURE.
Vapor Harmful. May Cause Flash Fire. Eye and Skin Irritant.
Read Precautions On Rear Panel Before Use.

Net wt. 14 oz. / 397 grams

11175 Z