

EASTWOOD SILVER CAD accurately replicates the bluish-silver tint of original cadmium plating with a 10%-20% gloss level. Ideal for coil clamps, pulleys, linkage rods, fasteners and much more. Withstands underhood temperatures up to 300°F and one aerosol covers approximately 6 square feet.

DIRECTIONS – READ ALL INSTRUCTIONS BEFORE USING THIS PRODUCT

1. Surface must be clean and dry before painting. Use Eastwood's PRE Painting Prep to remove grease and oil. For maximum protection, prepare bare metal with primer before top coating. For best results, use when can is between 70° and 90° F (21° and 32° C).
2. SHAKE CAN VIGOROUSLY for at least one minute before and occasionally during use. Spray surface with steady, even strokes at a distance of 8 to 10 inches. Several light coats give a better finish than one heavy coat.
3. If clogging develops, turn spray button 1/4 turn or remove and clean spray button slot.
DO NOT stick objects into can opening.

IMPORTANT: To prevent clogging, after each use, invert the can and spray a few short blasts to clear the valve.
Do Not allow gasoline or acetone to contact surface for a prolonged period of time.

CONTAINS: Ethyl Acetate (CAS #141-78-6), Propane (CAS #74-98-6), Acetone (CAS #67-64-1), N-Butane (CAS #106-97-8), N-Butyl Acetate (CAS #123-86-4), Isobutane (CAS #75-28-5), Hydrotreated Heavy Petroleum Naphtha (CAS #64742-48-9), Toluene (CAS #108-88-3) and Titanium Dioxide (CAS #13463-67-7). 38.36% of the ingredients have an unknown acute toxicity.

DANGER: Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing cancer. Suspected of damaging fertility or the unborn child.

PRECAUTIONARY STATEMENTS: Do not handle until all safety precautions have been read and understood. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Avoid breathing spray. Wash hands thoroughly after use. Use only outdoors or in a well-ventilated area. Wear protective gloves and eye protection. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Store in a well-ventilated place. Dispose of contents/container per applicable regulations.

FIRST AID: If exposed, concerned or feel unwell: Call a physician. IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

VOC CONTENT: MCP Max MIR 1.25



WARNING: Reproductive Harm –
www.P65Warnings.ca.gov

KEEP OUT OF REACH OF CHILDREN

Only in the Event of a Chemical Emergency Involving A Spill, Leaks, Fire,
or Exposure Call Chemtrec Toll Free Day or Night:
1-800-424-9300 International Call Collect: (202) 483-7616


Manufactured for The Eastwood Company
263 Shoemaker Road, Pottstown, PA 19464 1-800-343-9353 www.eastwood.com
© Copyright 2020 Eastwood Automotive Group LLC Made in USA



DO THE JOB RIGHT.®

SILVER CAD

REPLICATION COATING

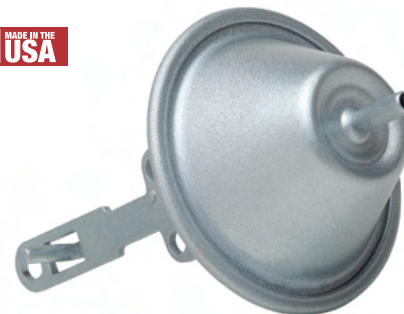

- Replicates The Look Of Silver Cadmium Plating
- Ideal For Underhood and Undercar Components
- Durable Formula Withstands Temperatures Up To 300°F

DANGER:
EXTREMELY FLAMMABLE AND UNDER PRESSURE.
EYE IRRITANT.
Read Precautions On Rear Panel Before Use.

Net Wt. 12 oz. (340 g)

10022Z