



DO THE JOB RIGHT.™

# CHASSIS BLACK®

## SATIN COATING

**EASTWOOD ORIGINAL CHASSIS BLACK** is formulated to provide you with the right sheen, durability and long lasting great looks. Its 25-35% gloss level is correct for many factory restorations or use in a custom application. Ideal for frames, suspension components, roll bars, differentials, floor boards and much more. Fortified with high solids and epoxy, Chassis Black resists chips, UV rays and high temperatures up to 300°F. One aerosol can covers approximately 8 square feet.

### DIRECTIONS – READ ALL INSTRUCTIONS BEFORE USING THIS PRODUCT!

1. Surface must be clean and dry before painting. Use Eastwood PRE Painting Prep (10041Z) to remove grease and oil. Can be used over bare metal or over primer. For increased adhesion and durability, prime bare metal with Extreme Chassis Black Primer Aerosol (11193Z), wait 4 hours (scuff surface beyond 24 hours with 320 grit) and topcoat with Chassis Black.  
**Do not use over self-etching primers.** Test for compatibility if not using over Extreme Chassis Black Primer or Eastwood Rust Encapsulator. For best results, use when can and surface are between 70°-90°F (21°-32°C), 50% or less humidity.
2. SHAKE CAN VIGOROUSLY for at least one minute before and occasionally during use. Spray surface with steady, even strokes at a distance of 8-10 inches. Several light coats give a better finish than one heavy coat.
3. Apply enough paint to achieve full hiding. For fastest cure, apply a maximum of 2 coats primer and 2 coats Chassis Black.
4. If clogging develops, turn spray button 1/4 turn or remove and clean spray button slot. DO NOT stick objects into can opening.
5. Finished article should be allowed to dry 4 hours before use, full cure in 12-24 hours.

**CONTAINS:** Propane (CAS #74-98-6), Acetone (CAS #67-64-1), T-Butyl Acetate (CAS #540-88-5), Hydrotreated Light

Petroleum Distillate (CAS #64742-47-8), 4-Chlorobenzotrifluoride (CAS #98-56-6), PM Acetate (CAS #108-65-6), Xylene (CAS #1330-20-7), Carbon Black (CAS #1333-86-4), Ethyl Benzene (CAS #100-41-4), Methyl Ethyl Ketoxime (CAS #96-29-7) and Zirconium (CAS #22464-99-9). 40.28% of the ingredients have an unknown acute toxicity.

**DANGER:** Extremely flammable aerosol. Contains gas under pressure; may explode if heated. May be fatal if swallowed and enters airways. Causes skin and serious eye irritation. May cause an allergic skin reaction. Suspected of causing cancer. Suspected of damaging fertility or the unborn child.

**PRECAUTIONARY STATEMENTS:** Do not handle until all safety precautions have been read and understood. Keep away from heat, sparks, open flames or hot surfaces. No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Avoid breathing spray. Wash hands thoroughly after handling. Contaminated work clothing must not be allowed out of the workplace. Wear protective gloves and eye protection. Store in a well-ventilated place. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Dispose of contents and container in accordance with applicable regulations.

**FIRST AID:** If exposed or concerned: Get medical advice. **IF SWALLOWED:** Immediately call a POISON CENTER. Do NOT induce vomiting. **IF ON SKIN:** Wash with plenty of water. Take off contaminated clothing and wash it before reuse. If skin irritation or rash occurs: Get medical advice. **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice.

**VOC CONTENT:** NFP Max MIR 0.95

**KEEP OUT OF THE REACH OF CHILDREN**




**WARNING:** This product can expose you to chemicals including 4-Chlorobenzotrifluoride, which is known to the State of California to cause cancer, and Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Only in the Event of a Chemical Emergency Involving A Spill, Leaks, Fire, or Exposure Call Chemtrec Toll Free Day or Night: 1-800-424-9300 International Call Collect: (202) 483-7616

Manufactured for The Eastwood Company, 263 Shoemaker Road, Pottstown, PA 19464  
1-800-343-9353 [www.eastwood.com](http://www.eastwood.com)

© Copyright 2022 Eastwood Automotive Group LLC Made in USA

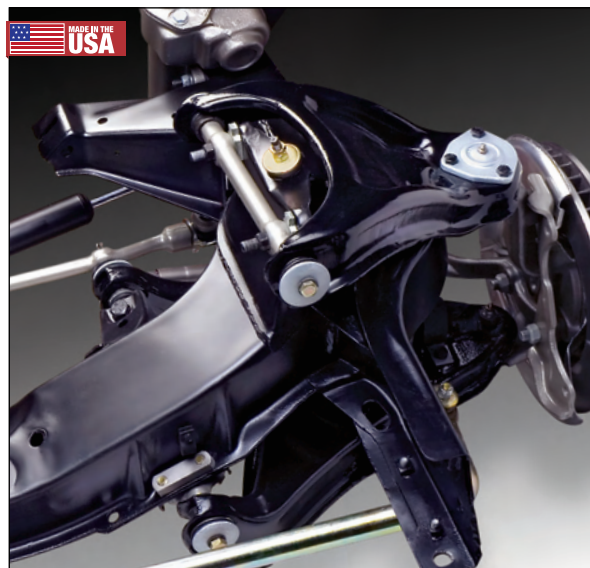

- Recreates A Perfect Factory Finish
- Epoxy-Fortified for Durability
- Resists Temperatures up to 300°F
- One Can Covers Approx. 8 Sq. Ft.

**DANGER:** CONTENTS EXTREMELY FLAMMABLE AND UNDER PRESSURE. HARMFUL OR FATAL IF SWALLOWED. SKIN & EYE IRRITANT. SKIN SENSITIZER. Read Precautions on Rear Panel Before Use.

Net wt. 14 oz. / 397 grams

10025Z



Label #10025ZL 3/22 Rev 4