

Eastwood

DO THE JOB RIGHT.

Part #12855

DUAL-OUTPUT AIRBRUSH COMPRESSOR INSTRUCTIONS



Thank you for purchasing the **Eastwood Dual Output Airbrush Compressor with Auto Shutoff**. This is a versatile and fully portable system requiring only a 110 Volt electrical supply to operate. There is no need for a large compressor. With care, this compressor will offer years of trouble free service.

SPECIFICATIONS:

- Power requirement: 110 Volt, 60hz.
- 1/6 horsepower motor.
- Output: 0.7 CFM @ 30 PSI
- Pump auto start/stop feature:
Start @ 40 PSI tank pressure/stop @ 60 PSI tank pressure.
- Tank capacity: 0.8 gallon.
- Airbrush nozzle size capability: 1.0mm maximum.
- Air output thread size: 1/8" NPT with included 1/8" NPT to 1/4" NPT adapter bushing.

SET-UP:

- Remove two black plastic airbrush holders from packaging and insert into receptacles on top of cabinet (Fig. A).
- Make sure the motor on/off switch (located on rear of motor) is in the "off" position (Fig. B), then plug the cord into a properly grounded 110 volt, AC outlet.
- Thread the airbrush hose (not included) fitting onto the output fitting on the cabinet (Fig. B), then attach it to your airbrush (not included).

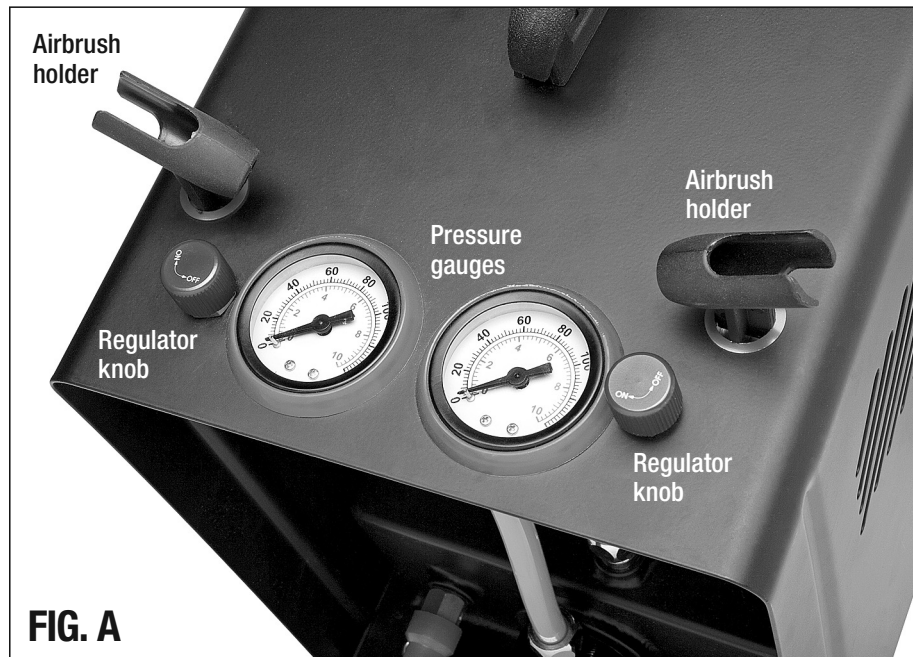


FIG. A

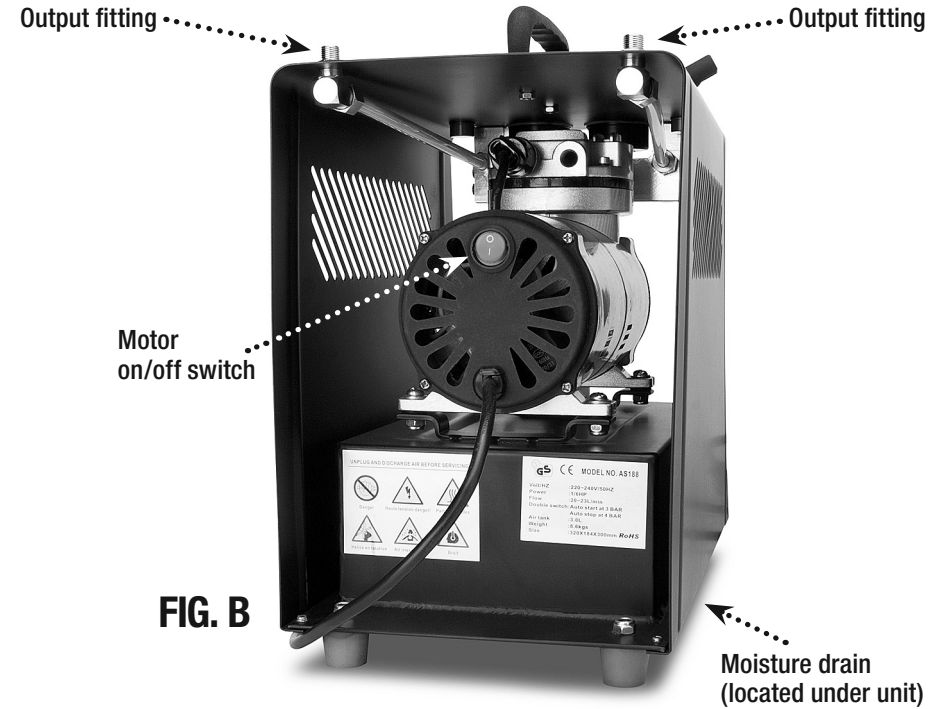


FIG. B

OPERATION:

- If using with only one airbrush, turn the unused regulator knob (Fig. A) counter-clockwise to the fully closed position.
- Rotate the knob of the regulator being used counter-clockwise to a nearly closed position to protect your airbrush from over pressure
- Set the power (located on the rear of the motor) switch to the on position and allow the compressor to run several minutes to build up pressure then slowly rotate the regulator knob clockwise in the on direction until you have achieved the recommended airbrush pressure setting. Note: if you are unsure, most airbrushes operate in the 25 to 35 PSI range.

Your Eastwood Dual Output Airbrush Compressor with Auto Shutoff is now ready for use.

MAINTENANCE:

- There is a moisture drain located at the underside of the unit. (Fig B) It is extremely important to open the valve and drain any accumulated moisture after every use.

ACCESSORIES:

- 12795 Concours Air Brush.
- 11608 Filter/Regulator Assembly.
- 12169 9' Air Brush Hose.
- 50043 Mickey Harris Beginning Air Brush DVD.
- 11468 Airbrush Cleaning Kit.
- 11233 "Sticky Mickey" Masking Film.
- 10041Z PRE Painting Prep.

If you have any questions about the use of this product, please contact

The Eastwood Technical Assistance Service Department:
800.544.5118 >> email: techelp@eastwood.com

The Eastwood Company 263 Shoemaker Road, Pottstown, PA 19464, USA
US and Canada: 800.345.1178 outside US: 610.718.8335
Fax: 610.323.6268 eastwood.com