



DO THE JOB RIGHT.®

RUBBERIZED UNDERCOATING

SUPERIOR UNDERCAR PROTECTION

EASTWOOD RUBBERIZED UNDERCOATING is a premium sealant with many automotive applications. Can be used for sealing trunk interiors, fender walls, floorboards, etc. It is good on any area where rust could be a problem. Will not chip or crack under normal conditions (dries fast with a factory-type finish). Flexible and abrasion resistant. Covers approximately 7 sq. ft. **DO NOT APPLY ON, OR VERY CLOSE TO, ENGINE OR EXHAUST COMPONENTS.**

DIRECTIONS – READ ALL INSTRUCTIONS BEFORE USING THIS PRODUCT

1. Clean and dry surface thoroughly before application. Remove wax, grease, dirt, etc. from the surface with Eastwood PRE Painting Prep (10041Z).
2. For best results, use when can and surface is between 70°-90°F (21°-32°C).
3. SHAKE CAN VIGOROUSLY for at least 1 minute after rattle ball is heard and occasionally during use to insure uniformity and to prevent clogging.
4. Point opening of spray button toward object, holding can 12-18" from surface to be coated. Use steady, even strokes while spraying. Apply masking tape over areas not to be coated.
5. If clogging develops, turn spray button 1/4 turn or remove and clean button with suitable solvent. Do not stick objects into can opening.
6. Do not incinerate or place in home garbage compactor.
7. Remove overspray on trim and exterior finish immediately with Eastwood PRE Painting Prep (10041Z), mineral spirits, or kerosene.

IMPORTANT: To prevent clogging, after each use, invert the can and spray a few short blasts to clear the valve.

CONTAINS (CAS #): Propane (CAS #74-98-6), Acetone (CAS #67-64-1), Toluene (CAS #108-88-3), Methyl Acetate (CAS #79-20-9), 4-Chlorobenzotrifluoride (CAS #98-56-6), Methyl Isobutyl Ketone (CAS #108-10-1) and Carbon Black (CAS #1333-86-4). 52.48% of the ingredients have an unknown acute toxicity.



DANGER: Flammable aerosol. Contains gas under pressure; may explode if heated. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure.

PRECAUTIONARY STATEMENTS: Do not handle until all safety precautions have been read and understood. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not breathe spray. Wash hands thoroughly after use. Use only outdoors or in a well-ventilated area. Wear protective gloves and eye protection. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Store in a well-ventilated place. Dispose of contents/container per applicable regulations.

FIRST AID: If exposed, concerned or feel unwell: Call a physician. IF SWALLOWED: Immediately call a POISON CENTER. Do NOT induce vomiting. IF ON SKIN: Wash with plenty of water. Take off contaminated clothing and wash it before reuse. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

VOC CONTENT: Undercoating - Aerosol 40%




WARNING:
Cancer and Reproductive Harm –
www.P65Warnings.ca.gov.

KEEP OUT OF REACH OF CHILDREN

Only in the Event of a Chemical Emergency Involving A Spill, Leaks, Fire, or Exposure Call Chemtrec Toll Free Day or Night: 1-800-424-9300 International Call Collect: (202) 483-7616

Manufactured for The Eastwood Company, 263 Shoemaker Road, Pottstown, PA 19464
1-800-343-9353 www.eastwood.com © Copyright 2020 Eastwood Automotive Group LLC Made in USA

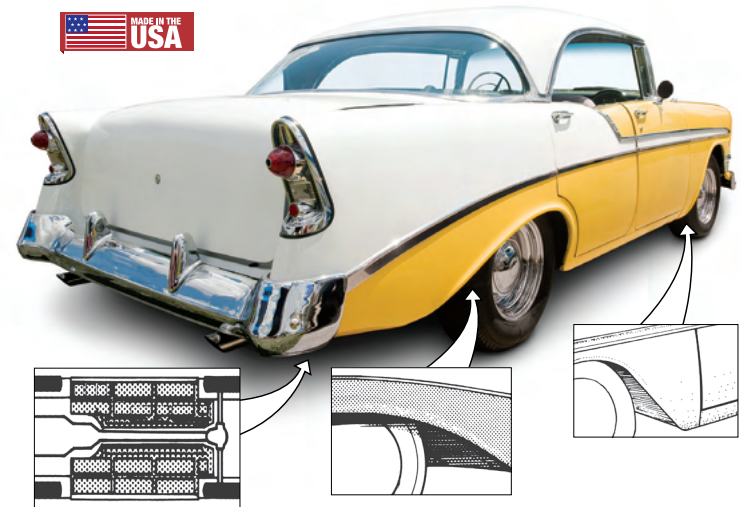

- Protects Your Car From Rust and Corrosion
- Reduces Road Noise
- Fast Drying and Flexible

DANGER: FLAMMABLE AND UNDER PRESSURE. HARMFUL OR FATAL IF SWALLOWED. SKIN AND EYE IRRITANT. Read Precautions On Rear Panel Before Use.

Net wt. 17 oz. / 481 grams

16007Z