

EASTWOOD DIAMOND CLEAR® is the ideal top coat to protect and preserve bare metal and painted surfaces. Use over unfinished or polished surfaces to protect from corrosion and ultra-violet light. Withstands temperatures up to 300°F. One can covers about 6-8 square feet.

DIRECTIONS – READ ALL INSTRUCTIONS BEFORE USING THIS PRODUCT

1. Clean part thoroughly. Remove wax, grease, oil, buffing compounds, etc. Use Eastwood PRE Painting Prep #10041Z.
2. For best results, use when can and surface temperature are between 70°-90°F (21°-32°C) and humidity is 50% or lower.
3. Shake can vigorously for at least 1 minute before and occasionally during use. Hold can approximately 12" from surface. Use even, overlapping strokes. Apply several thin, even coats allowing 15 minutes dry time between each coat. For best protection and durability, make sure you have complete coverage on the entire piece.
4. Allow surface to completely dry 24 hours before handling.
5. If clogging develops, turn spray button 1/4 turn. If clogging persists, remove and clean button with suitable solvent. Do not stick pin or sharp object into can opening.
6. Discard empty can according to Federal, State, and Local regulations. Do not place in home garbage compactor.

IMPORTANT: To prevent clogging, after each use, invert the can and spray a few short blasts to clear the valve.

CONTAINS: Propane (CAS #74-98-6), Methyl Ethyl Ketone (CAS #78-93-3), Acetone (CAS #67-64-1), T-Butyl Acetate (CAS #540-88-5), VM&P Naphtha (CAS #64742-89-8), Ethyl Acetate (CAS #141-78-6), Methyl Acetate (CAS #79-20-9), Xylene (CAS #1330-20-7), and Ethyl Benzene (CAS #100-41-4). 33% of the ingredients have an unknown acute toxicity.

DANGER: Extremely flammable aerosol. Contains gas under pressure; may explode if heated. May cause an allergic skin reaction. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing cancer.

PRECAUTIONARY STATEMENTS: Do not handle until all safety precautions have been read and understood. Keep away from heat, sparks, open flames and hot surfaces. No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Avoid breathing spray. Wash hands thoroughly after use. Use only outdoors or in a well-ventilated area. Contaminated work clothing should not be allowed out of the workplace. Wear protective gloves and eye protection. Store in a well-ventilated place. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Dispose of contents/container per local regulations.

FIRST AID: If exposed, concerned or feel unwell: Call a physician. IF ON SKIN: Wash with plenty of water. If skin irritation or rash occurs: Get medical advice. IF INHALED: Remove to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice. Wash contaminated clothing before reuse.


VOC CONTENT - CCP Maximum MIR 0.85

WARNING: Cancer – www.P65Warnings.ca.gov.

Only in the event of a chemical emergency involving a spill, leaks, fire, or exposure call Chemtrec toll-free day or night:
1-800-424-9300 International call collect: (202) 483-7616

Manufactured for The Eastwood Company, 263 Shoemaker Road, Pottstown, PA 19464
USA: 1-800-345-1178 Canada: 1-800-820-9042
International: (610) 323-2200 www.eastwood.com


© Copyright 2016 Easthill Group, Inc. Made in USA Label #16106ZL 11/16 Rev 1



DO THE JOB RIGHT.™

DIAMOND CLEAR®

SATIN FINISH

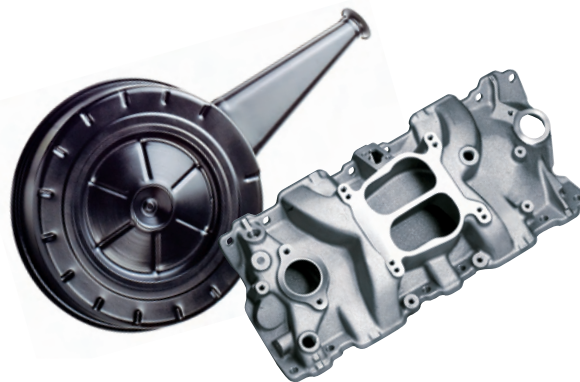

- Seals & Protects Surfaces
- Compatible With All Metals & Coatings
- Heat Resistant Up To 300°F



Scan for product info

DANGER:
CONTENTS EXTREMELY FLAMMABLE AND UNDER PRESSURE.
Irritating to the skin and eyes.
Read Precautions On Rear Panel Before Use.

Net wt. 11 oz. / 312 grams

16106Z