

*Eastwood*

DO THE JOB RIGHT.

Item #30826

# AIR HOSE REEL SWIVEL BRACKET INSTRUCTIONS



The **EASTWOOD AIR HOSE REEL SWIVEL BRACKET** accepts the Eastwood #70449 Eastwood Retractable Hose Reel as well as many others with its multiple bolt pattern, 12 mounting hole plate design.

## INCLUDES

(1) Air Hose Reel Swivel Bracket



## SAFETY INFORMATION



### READ INSTRUCTIONS!

Read this entire manual before set up and use.




### WARNING!




- Unit must be securely mounted on a wall, ceiling, floor, workbench etc, capable of holding the combined static weight of the Hose Reel unit (Eastwood #70449 = 24 lbs. [10.9 kg]), the Swivel Bracket (7.75 lbs. [3.5kg.] plus significant pulling stresses from operation. The use of 1/2" bolts or lag screws with substantial washers and attachment to a structural member is highly recommended.
- Pinch Hazard. Keep hands and fingers away from moving parts when in use.
- Check for possible interference with electrical lines, other utilities, garage door mechanisms or other obstructions before mounting.
- Do not mount as an obstruction where bodily contact could cause injury.

# SPECIFICATIONS

- Mounting Base Plate Hole Pattern = ( 4 ) 0.50" [12.7mm] Diameter Holes @ 3.5" x 5.56" [89mm x 142mm].
- Hose Reel Plate Mounting Hole Patterns:
  - A** = ( 4 ) 0.50" [12.7mm] Diameter Holes @ 3.44" x 6.65" [88mm x 170mm].
  - B** = ( 4 ) 0.50" [12.7mm] Diameter Holes @ 5.59" x 6.65" [142mm x 170mm].
  - C** = ( 4 ) 0.50" [12.7mm] Wide Slotted Holes @ 3" to 4" [76mm to 101mm].

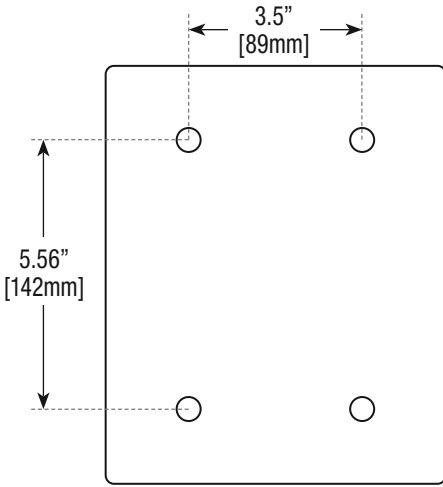

**Base Plate**

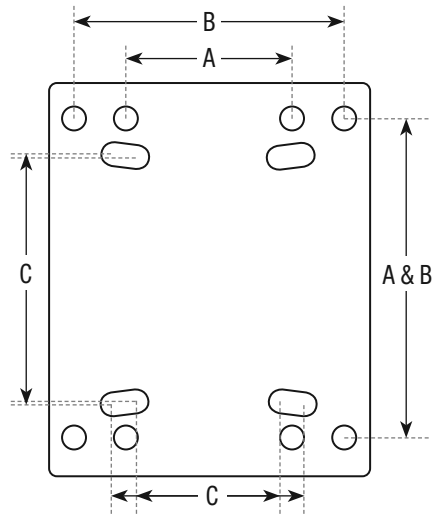

**Hose Reel Plate**

# INSTALLATION

- It is easier and safer to install the Eastwood Air Hose Reel Swivel Bracket on the wall, ceiling, floor, workbench etc. before attaching the Air Hose Reel.
- Use the hole dimensions listed in this instruction booklet for mounting hole locations.
- Unit must be securely mounted on a wall, ceiling, floor, workbench etc, capable of holding the static weight of the unit (24 lbs. [10.9 kg]) plus significant pulling stresses from operation. The use of 1/2" bolts or lag screws with substantial washers and attachment to a structural member is highly recommended.
- If placing unit on a studded wall, the use of a 6" x 3/4" board capable of spanning a minimum of 2 studs is required as a mounting surface.
- If attaching to a hollow block wall, the use of a 6" x 3/4" x 12" board affixed to the wall using proper anchors with the load spread is required as a mounting surface.

---

**If you have any questions about the use of this product, please contact**

The Eastwood Technical Assistance Service Department: 800.544.5118 >> email: [techelp@eastwood.com](mailto:techelp@eastwood.com)

PDF version of this manual is available online >> [eastwood.com/30826manual](http://eastwood.com/30826manual)

The Eastwood Company 263 Shoemaker Road, Pottstown, PA 19464, USA

US and Canada: 800.345.1178 Outside US: 610.718.8335

Fax: 610.323.6268 [eastwood.com](http://eastwood.com)