

Eastwood[®]

DO THE JOB RIGHT.[®]

Part #31342


PRO SHOP FLOORING SYSTEM INSTRUCTIONS



The **EASTWOOD PRO SHOP FLOORING SYSTEM** is a heavy-duty Floor Covering System ruggedly designed for many years of maintenance free service. They are constructed of a very durable and flame resistant PVC that is impervious to automotive chemicals and will stand up to the rigors of automotive work.

CONTENTS

- (6) Tiles
(Edge and Corner pieces
available separately)

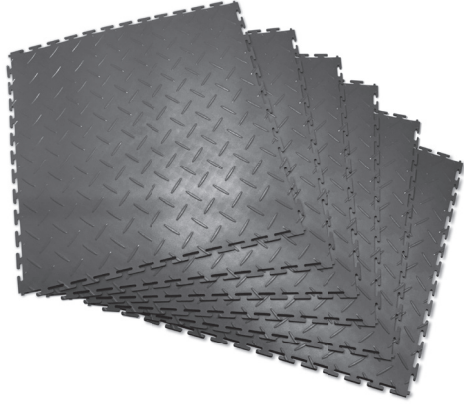

SPECIFICATIONS

- 19.5" X 19.5" Tile Size
- 15.8 SQ Feet per package
- 5mm thickness
- High Traction Diamond Tread design
- Easy to install and replace interlocking system

TOOLS REQUIRED

- Rubber Mallet
- Tape Measure
- If a tile needs to be trimmed a high quality Utility Knife is recommended.

SAFETY INFORMATION

The following explanations are displayed in this manual, on the labeling, and on all other information provided with this product:

⚠ DANGER

DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

⚠ WARNING

WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

⚠ CAUTION

CAUTION used with the safety alert symbol, indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.

⚠ NOTICE

NOTICE is used to address practices not related to personal injury.

SAFETY INFORMATION



⚠ READ INSTRUCTIONS

- Thoroughly read and understand these product instructions before using this Floor Covering.
- Keep these product instructions for future reference.



⚠ WARNING INJURY HAZARDS!

- Always wear ANSI approved eye protection during the installation of this floor covering.
- Be sure to follow all Safety Instructions regarding the tools used for installation.
- This floor covering is fire resistant but it is not fire proof. Extra care must be taken when sparks, flames, hot metal and other hot objects are in contact or close vicinity with this floor.
- Trimming tiles may create sharp edges. Wear work gloves to avoid cuts.



⚠ NOTICE INJURY HAZARDS!

- Do not use below Grade on an unsealed concrete surface. The floor underneath the tile must be free of moisture to prevent microbial growth over time.

INSTALLATION

- For a full shop floor installation it is recommended to follow the pattern outlined in **FIG 1**. It is recommended to trim tiles as needed and one at a time to ensure optimum fit. It is critical that a 1/2" gap is left between the edge of a tile and any fixed object to allow for expansion.
- To create a Standard size mat, first connect tiles together to create the desired size. Install edges and corners once the desired size has been created.

FIG1

Front of Garage

11	10	9	8	1	36	37	38	39
15	14	13	12	2	40	41	42	43
19	18	17	16	3	44	45	46	47
23	22	21	20	4	48	49	50	51
27	26	25	24	5	52	53	54	55
31	30	29	28	6	56	57	58	59
35	34	33	32	7	60	61	62	63

MAINTENANCE

Clean shop floor tiles with soap and water. Do not use any product that may decrease traction and make the floor slippery.

ADDITIONAL ITEMS

#31343 Shop Floor Tile Edge

#31344 Shop Floor Tile Corners

If you have any questions about the use of this product, please contact

The Eastwood Technical Assistance Service Department: 800.544.5118 >> email: techelp@eastwood.com

PDF version of this manual is available online >> eastwood.com/31342manual

The Eastwood Company 263 Shoemaker Road, Pottstown, PA 19464, USA

US and Canada: 800.345.1178 Outside US: 610.718.8335

Fax: 610.323.6268 eastwood.com