



DO THE JOB RIGHT.®

RUST CONVERTER

EASTWOOD RUST CONVERTER halts rust in its tracks and converts it into a black paintable polymeric coating. This coating is used as a primer on rusted metals and can be top coated with most paints. Once sealed with a top coat, the rust will not return or spread.

DIRECTIONS – READ ALL INSTRUCTIONS BEFORE USING THIS PRODUCT!

Wire brush the loose rust from the surface. Clean the surface to remove grease and grime. Shake well before use. Hold can 8-12 inches from surface and spray a thin coat onto the surface. After the surface has dried, it will turn black. Then apply a second thin coat. Allow 4 - 8 hours to completely cure before painting while protecting it from rain or dew. For long lasting protection, seal with two coats of a high quality paint. Do not apply if the surface temperature is below 50°F or above 90°F. Do not apply over paint or clean metal. Must be top coated or rust will return.

DANGER:

Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes skin irritation. May cause drowsiness or dizziness. May cause damage to organs through prolonged or repeated exposure.



Keep away from heat, sparks, open flames, and hot surfaces. No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. Store in a well-ventilated place. Wash hands thoroughly after handling. Wear eye protection. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice or attention. Do not breathe mist, vapors or spray. Use only outdoors or in a well-ventilated area. If inhaled: Remove person to fresh air and keep comfortable for breathing. Call a poison center or doctor if you feel unwell. Dispose of contents and container in accordance with local, state and federal regulations.

CONTAINS (CAS#): Acetone 67-64-1, Butane 106-97-8, Isopropyl alcohol 67-63-0, Propane 74-98-6, 2-Butoxyethanol 111-76-2.

See SDS for complete safety information.


RUST CONVERTER: MIR: 1.1

KEEP OUT OF REACH OF CHILDREN

Only in the Event of a Chemical Emergency Involving A Spill, Leaks, Fire, or Exposure Call Chemtrec Toll Free Day or Night: 1-800-424-9300 International Call Collect: (202) 483-7616

Manufactured for The Eastwood Company, 263 Shoemaker Road, Pottstown, PA 19464 1-800-343-9353 www.eastwood.com

© Copyright 2021 Eastwood Automotive Group LLC

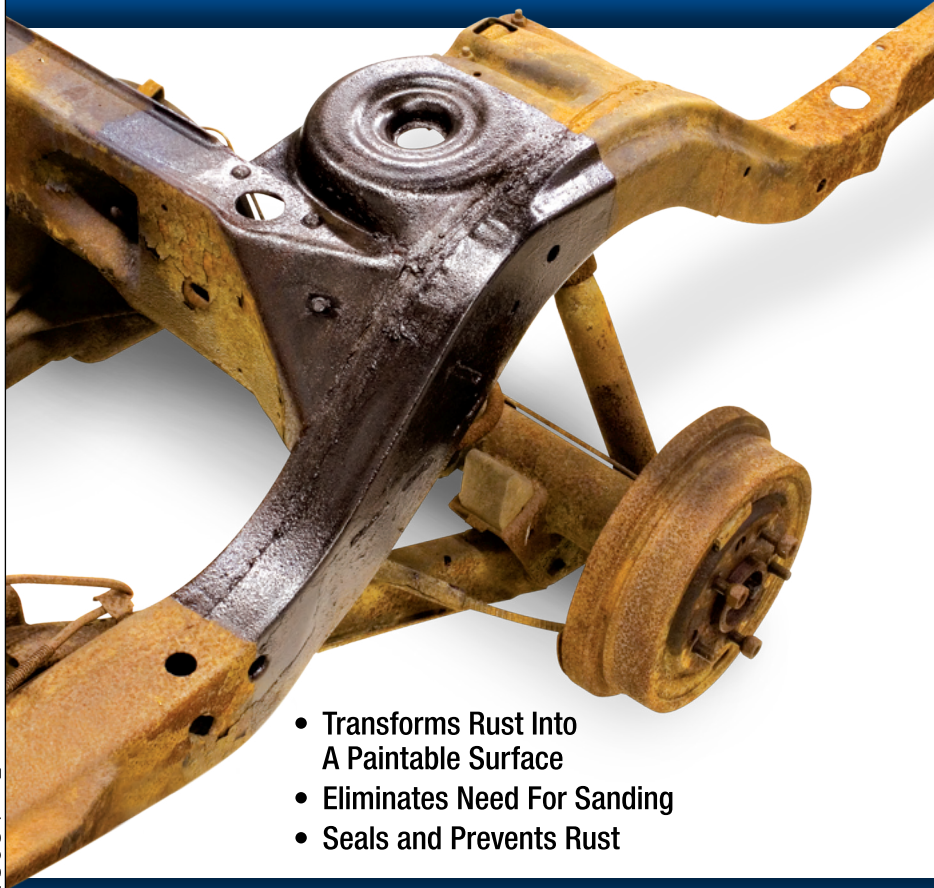

- Transforms Rust Into A Paintable Surface
- Eliminates Need For Sanding
- Seals and Prevents Rust

DANGER: Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Keep out of reach of children. See additional precautionary statements on back panel.

Net wt. 13 oz. (369 g.)

51483Z