

Eastwood[®]

DO THE JOB RIGHT.[®]

Item #60002

CAR CART PARTS STORAGE RACK INSTRUCTIONS



The **EASTWOOD CAR CART PARTS STORAGE RACK** is an all-in-one cart for tool and parts storage. This cart gives the user organization of the work area and allows for quick transfers of parts and tools within the workspace.

CONTENTS

BOX A

- (1) Base [A]

BOX B:





- (1) Left Upright [B]
- (1) Right Upright [C]
- (1) Upright Cross Brace [D]
- (1) Left Upright Cross Gusset [E]
- (2) Upright T-Brace [F]
- (2) Rod with M12 Nut Installed [G]

BOX C

- (4) Wire Baskets [H]

BOX D

- (2) Swivel Locking Casters with Hardware [J]
- (4) Swivel Casters with Hardware [K]
- (8) Basket Supports [L]
- (54) M8x1.25x50 Bolts
- (108) M8 Washers
- (54) Locknuts
- (1) Bag containing:
 - (2) M8x1.25x55 Bolts
 - (4) M8 Washers
 - (2) M8 Locknuts

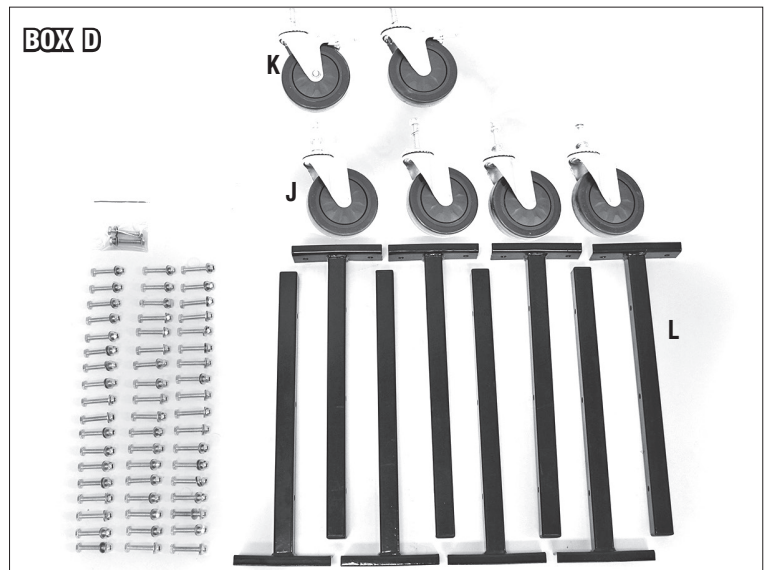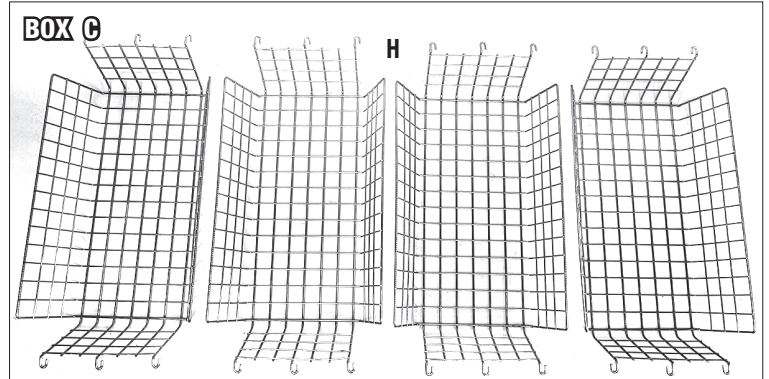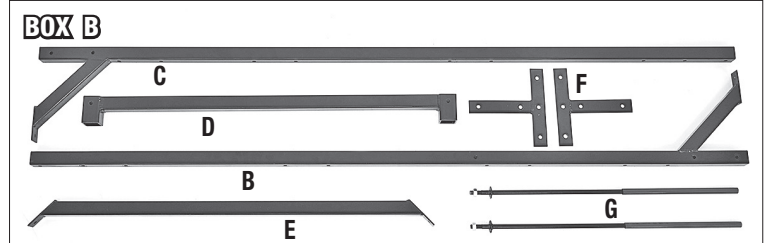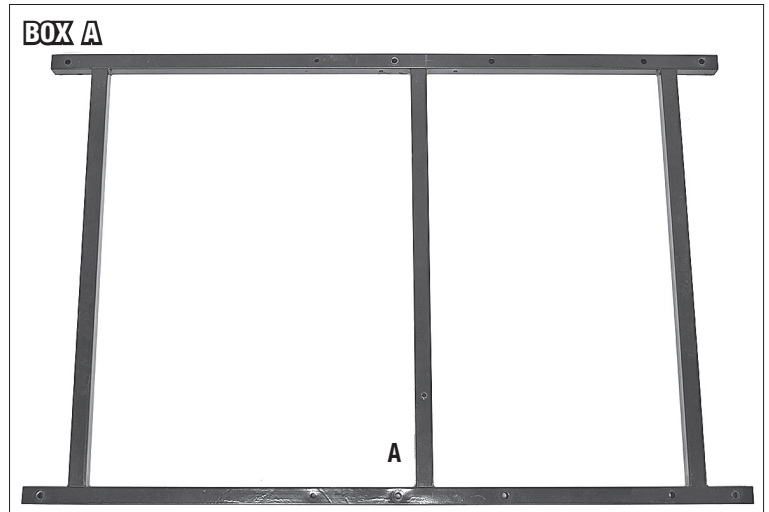

SPECIFICATIONS

- Overall Weight Rating:** 600 lbs.
- Basket Weight Rating Per Shelf:** 100 lbs.
- Rear Storage Area Weight Rating:** 200 lbs.

SAFETY INFORMATION

The following explanations are displayed in this manual, on the labeling, and on all other information provided with this product:

⚠ DANGER

DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

⚠ WARNING

WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

⚠ CAUTION

CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.

⚠ NOTICE

NOTICE is used to address practices not related to personal injury.



⚠ READ INSTRUCTIONS

- Thoroughly read and understand this manual before using.
- Save for future reference.



⚠ DANGER CAR CART CAN TIP OR COLLAPSE CAUSING SEVERE INJURY!

- **DO NOT** attempt to mount a top-heavy load. Keep load as low as possible for greatest stability.
- **DO NOT** concentrate a heavy load to either side or end of the Car Cart. This can cause the balance to shift suddenly, tipping the Car Cart and its load which can quickly cause severe injury and property damage!
- **DO NOT** exceed the rated 600 lbs. [272 kg]. weight capacity.
- **DO NOT** use to support humans or animals.
- **DO NOT** climb on the Car Cart.
- **DO NOT** attempt to transport this Car Cart with a load on it by any hauling method.
- **DO NOT** use on a sloped or rough textured surface, earth, grass, sand, gravel or any other loose or unstable surface. Use only on a smooth, level, and clean work surface.



⚠ WARNING FALL HAZARD!

- Awkward, out of balance body positions may be attempted while trying to reach specific areas of the Car Cart during use. Failure to ensure proper footing can quickly result in a fall which could inflict serious personal injury or property damage.
- **DO NOT** use as a seat.
- **DO NOT** stand on the Car Cart.




⚠ WARNING INJURY HAZARD!

- **DO NOT** attempt to remove a wire basket while it is supporting a load

⚠ WARNING

- **DO NOT** remove or cover any of the factory supplied labels or warnings! They include specific safety information that must be communicated to future users.



⚠ CAUTION PINCH HAZARD!

- This Car Cart has moveable components that can crush and pinch. Keep fingers, hands, and feet away from pinch points when using.

ASSEMBLY

- Orient the Base structure as shown (**FIG 1**). Note the hole position in the center cross member. This is the top of the Base, as shown, for further assembly.
- Attach the four Swivel Casters [**K**] and two locking Swivel Casters [**J**] to the Base [**A**] with the hardware pre-installed on the casters (**FIGS. 2 & 3**). It is recommended to have both Locking Swivel Casters installed on the same end.
- Identify the Left Upright by the presence of an additional hole, as shown in (**FIG 4**).
- Attach the Left Upright [**B**] to the Base [**A**] by the angle support of the Upright with a M8x1.25x50 Bolt, two Washers and Locknut. Lightly tighten Bolt to allow some play in the Upright (**FIG. 5**). Repeat with the Right Upright [**C**].

⚠ NOTICE

Only work on one Upright at a time.

- Attach the Upright T-Braces [**F**] with five M8x1.25x50 Bolts, ten Washers, and five Locknuts per side. Only fasten the Bolts finger tight until all bolts are installed (**FIG. 6**).

⚠ NOTICE

Only work on one Upright at a time.

- Fully tighten all Bolts on the T-Braces [**F**] and angle supports.

FIG1

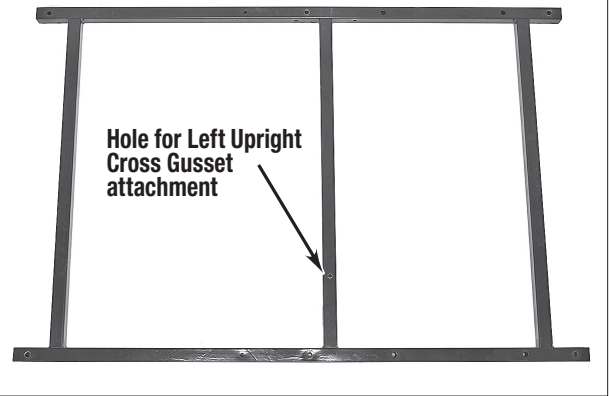


FIG2



FIG3

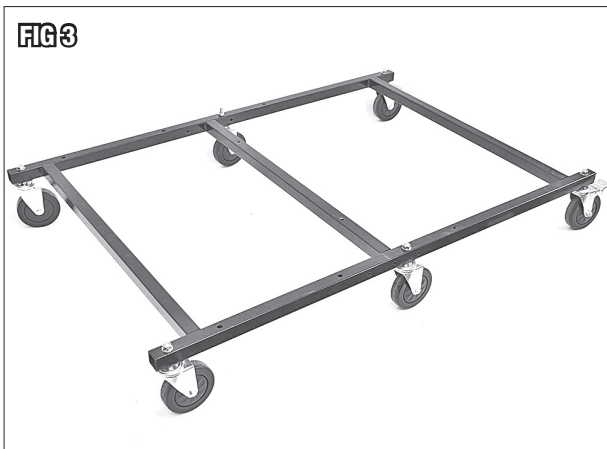


FIG4


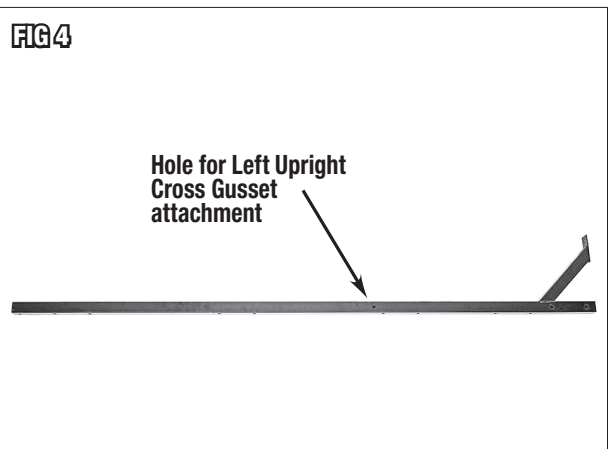




FIG5



FIG6

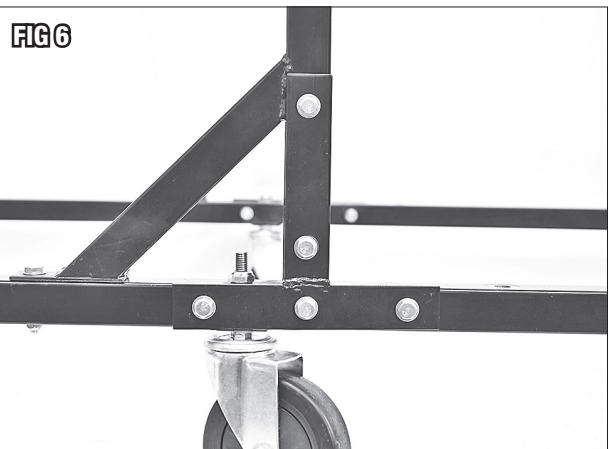

- Attach the Upright Cross Brace [D] to the Uprights [B & C] with the two M8x1.25x55 Bolts, four Washers, and two Locknuts (FIG. 7).
- Attach the Right Upright Cross Gusset [E] to the Left Upright [B] with two M8x1.25x50 Bolts, four Washers and two Locknuts (FIG. 8).
- Starting from the bottom and working up, attach the Basket Supports [L] to the Uprights [B & C] with two M8x1.25x50 Bolts, four Washers, and two Locknuts for each Bracket. Do not fully tighten the Supports (FIG. 9).
- Starting from the bottom and working up, attach the Baskets [H] to the Basket Supports [L] using six M8x1.25x50 Bolts, twelve Washers, and six Locknuts per Basket. Only fasten the Bolts finger tight until all six Bolts are installed (FIG. 10).

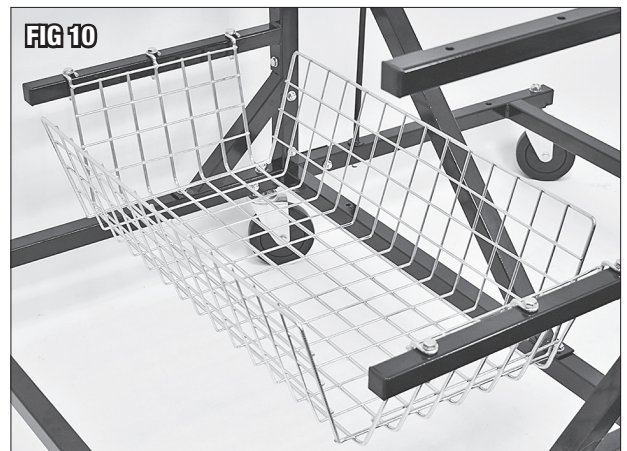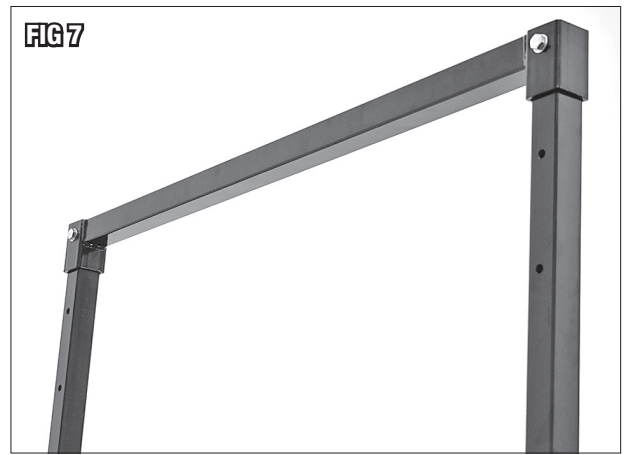

- Fully tighten all Bolts for each Basket [H].
- Fully tighten all Bolts for each Basket Support [L].
- Install the 2 Rods [G] into the Base [A] using the M12 Nut to secure them (FIG. 11).
- The Eastwood Car Cart is ready for use (FIG. 12).



MAINTENANCE

- The Car Cart is finished in rugged powder coating which will provide many years of effort free beauty however it is advisable to keep the finish clean and free from excessive dust and dirt.
- Keep the Car Cart in a clean and dry environment. **DO NOT** store it in or expose it to a damp or wet environment.
- Before each use, inspect all components for potential damage and proper alignment. Check all hardware for tightness
- **DO NOT** use if damage is discovered.

ADDITIONAL ITEMS

- #30185 Eastwood Magnetic Parts Trays
- #30186 Eastwood Magnetic Toolbox Trays
- #16075 Eastwood Rolling Shop Tray Tool Cart

If you have any questions about the use of this product, please contact

The Eastwood Technical Assistance Service Department: 800.343.9353 >> email: tech@eastwood.com

PDF version of this manual is available at eastwood.com

The Eastwood Company 263 Shoemaker Road, Pottstown, PA 19464, USA 800.343.9353 eastwood.com

© Copyright 2021 Eastwood Automotive Group LLC 11/21 Instruction item #60002Q Rev 1